



AVA LED

TN-PRO-IF-2

P2,5

Data Sheet

QUALITY IN DETAIL



INDOOR FRONT SERVICE SERIES

TN-PRO-IF-2 "P2,5" I
TN-PRO-IF-2 "P2,5" PRO I TN-PRO-IF-2 "P2,5" PLUS





TITLE OF CONTENTS

- 02-04 ○ Features
- 05 ○ Technical Specification
- 06 - 08 ○ Cabinet Size - Photo
- 09 - 10 ○ Safety - Instalation
- 11 - 12 ○ Vision
- 13 ○ Company Info

- Advanced Contrast Brightness Black technology,
- Advanced High Refresh Rate,
- Fast installation of panel to Light Frame,
- Just Signal person to install/uninstall, saving labor cost
- Die-Casting Aluminum-Magnesium frame design, fanless design.
- No noise, lower power consumption, good heat dissipation.

TN-PRO-IF-2 "P2,5"

- Standart Refresh Rate: 1920Hz
- C Class Led Chip
- Standart PCB Quality
- High Quality MASK
- Rotation 90 Degree

TN-PRO-IF-2 "P2,5" PRO

- High Refresh Rate: 3840Hz
- B Class Led Chip
- High Quality PCB
- High Quality MASK
- Rotation 90 Degree

TN-PRO-IF-2 "P2,5" PLUS

- High Refresh Rate: 3840Hz
- A Class Led Chip
- Best Quality PCB
- Best Quality MASK
- High end Refresh Rate
- 18 Bit
- Clear View
- Free Rotation
- HDR
- 4K Refresh Rate





Features

- *** FRONT SERVICE
- *** Light Weight
- *** Magnesium Die-Casting
- *** 3 in 1 Case weight with products: 129kg.
- *** Faster Cooling
- *** Advanced and safety Lock
- *** Nova Star Controller
- *** SPACE BLACK


MODEL NAME Version	TN-PRO-IF 2 " P2,5 "	TN-PRO-IF 2 PRO "P2,5"	TN-PRO-IF 2 PLUS "P2,5"
Pixel Pitch	2,5mm	2,5mm	2,5mm
Pixel Configuration	SMD2020	SMD2020	SMD2020
LED	Space Black	Space Black	Space Black
Processing	16 Bit	16 Bit	-
Processing	-	-	18 Bit
Pixel Density / m2	160000	160000	160000
Resolution/SQM	400 x 400	400 x 400	400 x 400
Cabinet Resolution 640x480	256 x 192	256 x 192	256 x 192
Pixel Density / Cabinet	49152	49152	49152
Module Size (mm)	320x160	320x160	320x160
Cabinet Size (mm)	640 x 480 x 70	640 x 480 x 70	640 x 480 x 70
Module Per Cabinet	6 MODULE	6 MODULE	6 MODULE
Module Resolution	128 x 64	128 x 64	128 x 64
Weight Per Panel Net kg. 640x480mm	6,5	6,5	6,5
Rotation per 90 Degree	✓	✓	✓
Free Rotation (with R5)	○	○	✓
Mapping	✓	✓	✓
Clear View	○	○	✓
Low Latency	○	○	✓
HDR	○	○	✓
Power Consumption (<w/sqm)	470	470	470
Average Power Consumption (<w/sqm)	141	141	141
Driving Method	1/32	1/32	1/32
Brightness	>1100 Nits	>1100 Nits	>1100 Nits
Refresh Rate	>1920Hz	-	-
Refresh Rate High Refresh	-	>3840Hz	>3840Hz
Refresh Quality	Standar	High Quality	Best Quality
High Refresh (PLL inside)	-	-	✓
High Refresh Power Saving	-	✓	✓
High Refresh Dynamic Power Saving	-	-	✓
Driving IC Type	Ordinary	PWM	PWM
Refrate Quality 2	Standar	High Refresh	4K Refresh Rate
No Waterless Ripple of Camera	>%50	>%75	>%90
Cabinet Material	Die-Casting Aliminum	Die-Casting Aliminum	Die-Casting Aliminum
Horizontal Viewing Angle	140 (±30)	140 (±30)	140 (±30)
Vertical Viewing Angle	140 (±30)	140 (±30)	140 (±30)
Expected LED Lifetime %50	100,000 Hours	100,000 Hours	100,000 Hours
IP Rating	IP20	IP20	IP20
PCB Quality	Best Quality	Best Quality	Best Quality
Module - Mask Quality	Best Quality	High Quality	Standart
LED Chip	Class C	Class B	Class A
Picture / Video Quality	Standart	High Quality	Best Quality
Grey Scale	65536	65536	262144
Control Systems	Nova Star	Nova Star	Nova Star
Operating Temperature Range	-20 – +60 (±10)	-20 – +60 (±10)	-20 – +60 (±10)
Operating Humidity Range	-40°C~+60°C,10%-90%RH	-40°C~+60°C,10%-90%RH	-40°C~+60°C,10%-90%RH
Voltage Range	200 ~240VAC	200 ~240VAC	200 ~240VAC
Packing include	Plate-Power-Cat5 Cable	Plate-Power-Cat5 Cable	Plate-Power-Cat5 Cable
Certificate	CE/EMC/LVD-ATR- EUR1 ISO-9001:2015 ISO-14001:2015	CE/EMC/LVD-ATR- EUR1 ISO-9001:2015 ISO-14001:2015	CE/EMC/LVD-ATR- EUR1 ISO-9001:2015 ISO-14001:2015

The data written in the catalog may differ by + - 10%

CABINET SIZE

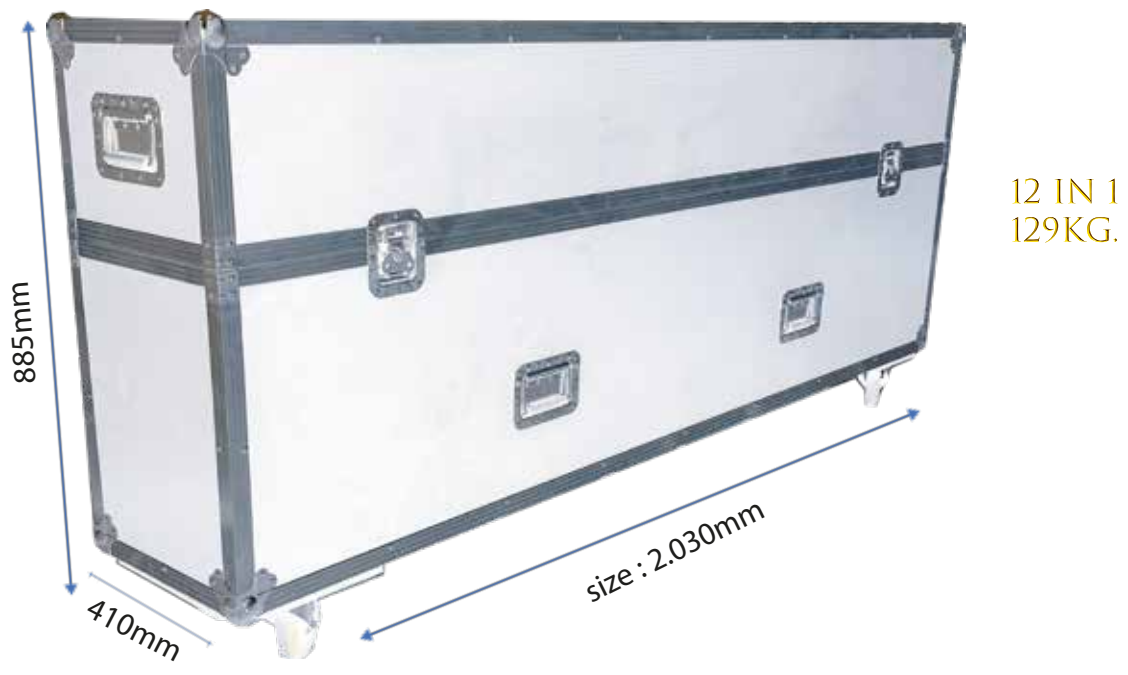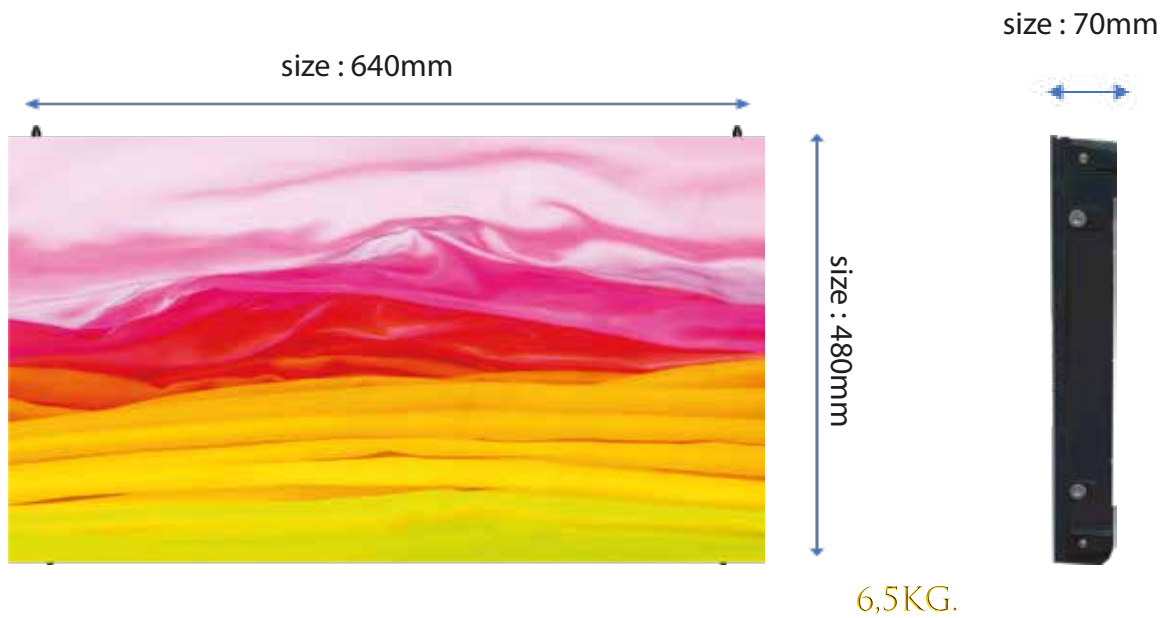


PRODUCT PHOTO

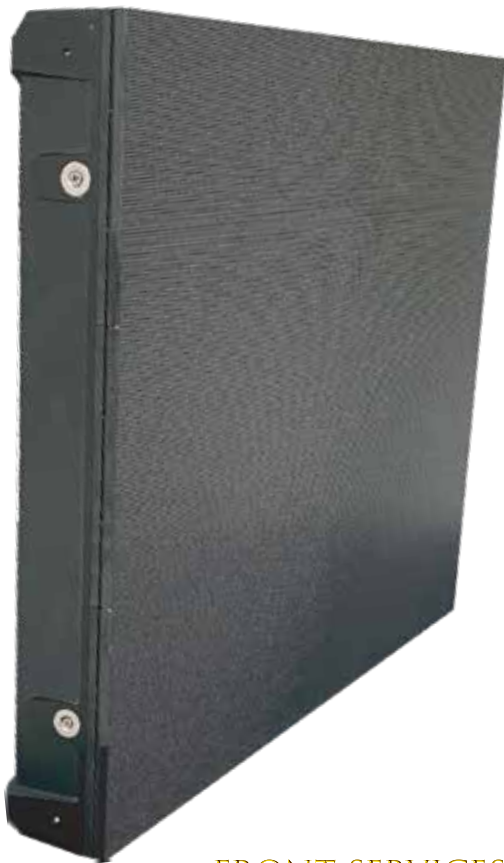

FRONT SERVICES





QUALITY IN DETAIL

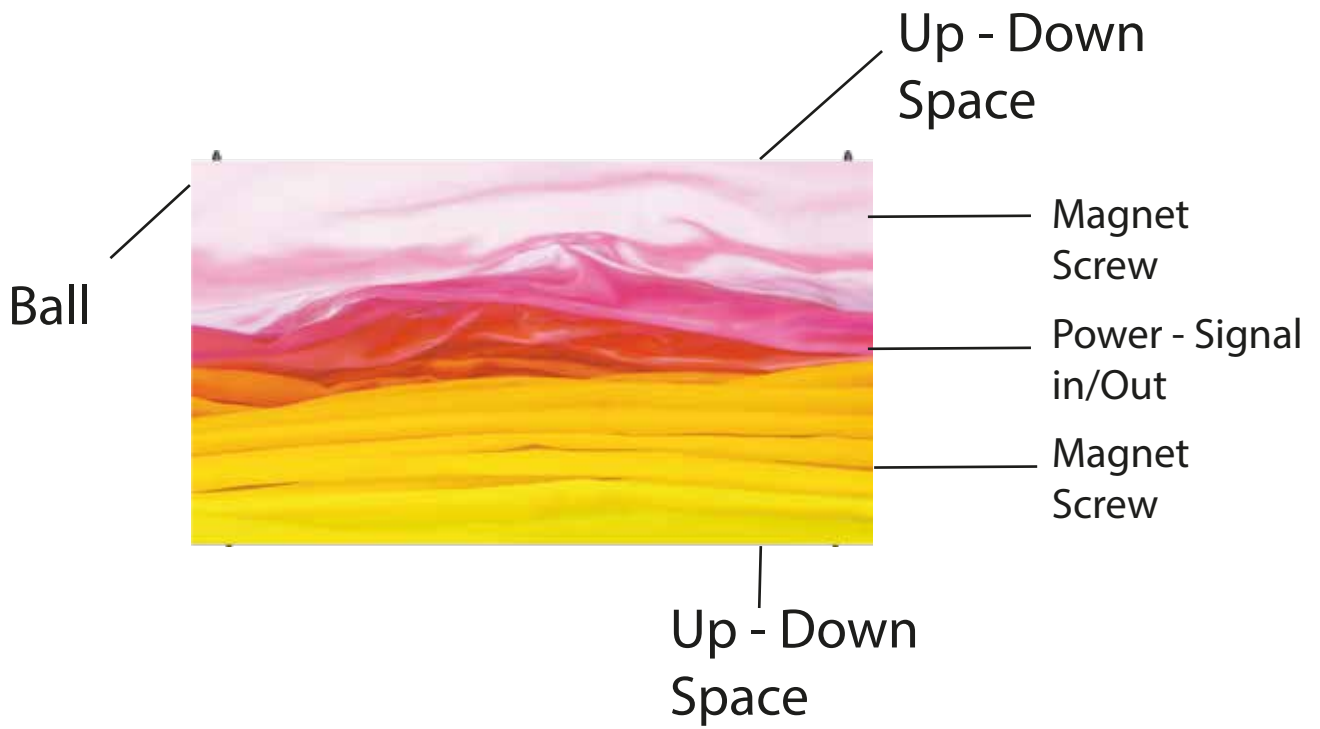

Ultra High Definition

It delivers a truly amazing picture with extraordinary pixels producing an image that is HD quality in an LED Screen. ipsum



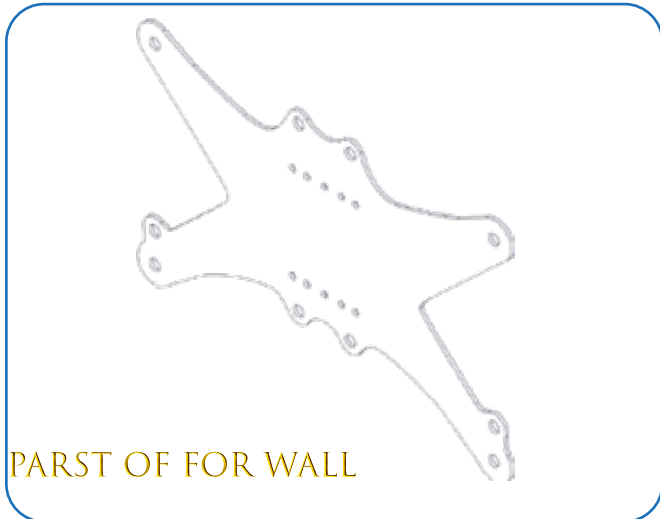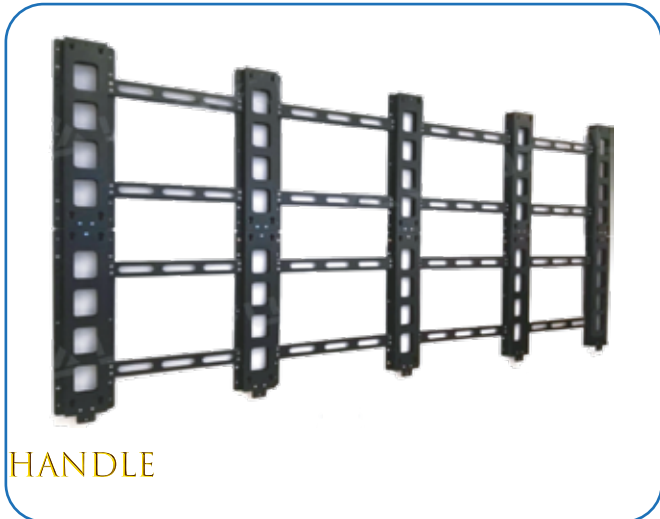

The support structure has to be provided and installed by the customer because they vary from project to project. The following issues must be considered:


Weight tolerances: Ensure that the support structure and the floor on which or the wall against which the support structure has to be installed, is qualified to handle the complete weight of the LED display screen.(which can be provided by manufacturer.

Environmental conditions: Humidity, wind, temperatures, rain, snow etc.

Location: Outdoor/.Indoor, altitude, etc. Usually, for outdoor display screen, the customer should build top cover and side cover for IP protection (Including waterproof and dustproof)

Ground stability

Front clearances: For making sure there is sufficient free area in front of the LED display screen and respect the maximum viewing angles and distance. Local regulations regarding such installation.

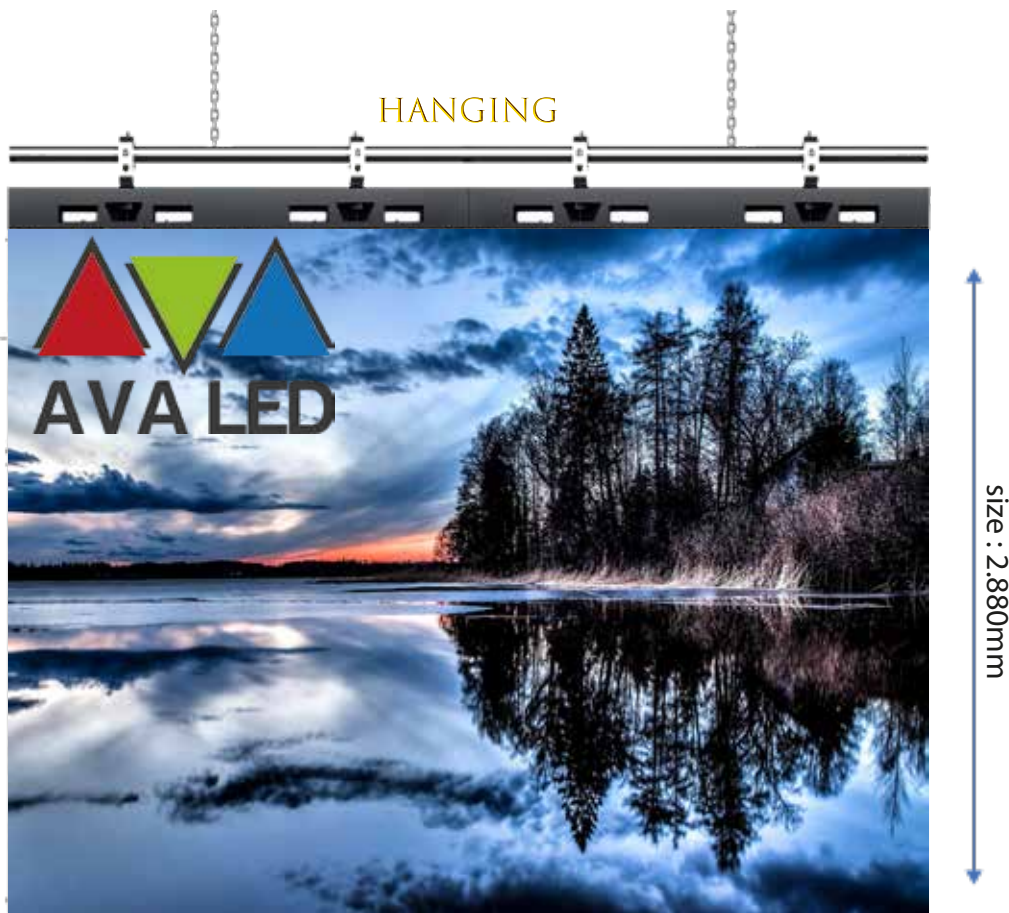

size : 3.840mm

size : 2.880mm

ULTRA WIDE VIEWING ANGLE



Both 160° from horizontal & vertical for the viewing angle.
Seeing from five directions, it would be still the natural and clear image in an LED display.

ULTRA FAST RESPONSE



Perfect Rendering Dynamic Picture

Response speed



Smear Ghosting Phenomenon


18 BIT GREY SCALE



AVA LED



Others

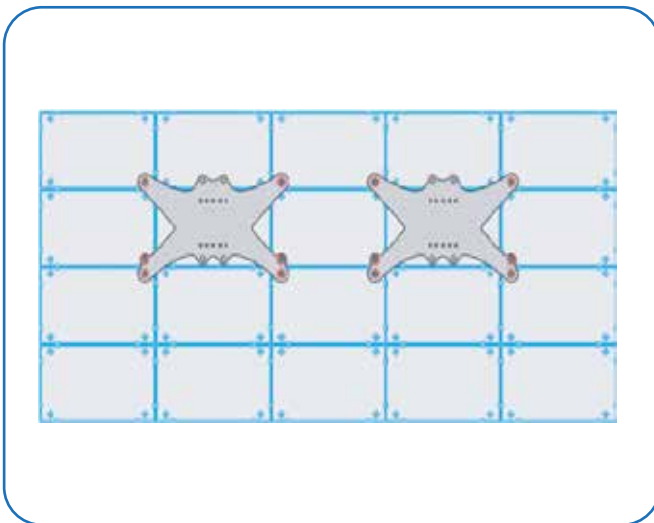

VISION



AVA LED

www.avaledscreen.com
info@avaledscreen.com

AVA GROUP GMBH

Adress: Goethestraße 7D - 40237 Düsseldorf / Germany

Phone : +49 211 730 64 817

